




24926 Highway 108
Sierra Village, CA 95346
Phone: (800) 545-1022
Fax: (209) 586-1026
E-Mail: sales@olsontech.com

OTOR-870 LOW LEVEL OPTICAL RECEIVER

Features / Benefits

The **OLSON TECHNOLOGY INC. OTOR-870** Low Level Optical Receiver is optimized for those applications that require the ultimate in performance at low optical input levels. This receiver is designed for those “last mile” applications where optical power is at a premium.

The unit operates from a single 5.2V supply and consumes less than 2.5 watts. Its push pull design from the detector to the output insures excellent CSO/CTB performance with full channel loading. External optical power monitor test points are available as is a power monitor connection to the power / interface connector. This feature in conjunction with the shut down feature allows for this unit to be utilized in redundant switching applications.

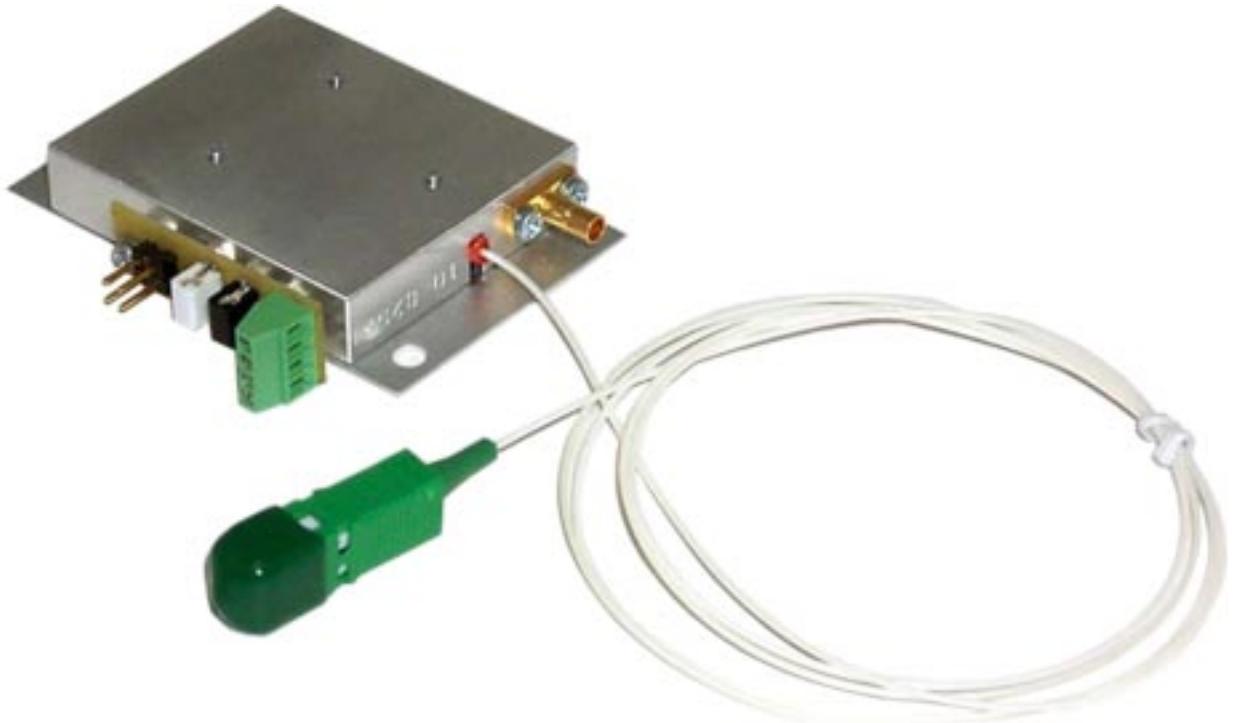

Quality / Engineering / Innovation

www.olsontech.com

OTOR-870

Optical Power Input Range.....	-6dBm to +1dBm 1310 / 1550 N meter
RF Band Width.....	48MHz to 870MHz
Optical to RF Conversion EFF.....	3.2% OMI Transmitter @ -3dBm optical
Output Return Loss.....	>15dB – 48MHz to 870MHz
*Typical C/N @ -6dBm Optical.....	>50dB
D.C. Power Requirements.....	5.2 volts @ .4 amp
CSO/CTB @ 0dBm Optical.....	>65dB (77 channel loading to 550MHz + Noise loading at –6dB to 870MHz)
Optical Input Connector.....	SC / APC
RF Output Connector	75 Ω SMB
Amplifier Shut-off.....	Pull down to ground on external terminal
Optical Power Monitor.....	1V/mW – Stays operational in shut down mode External T.P. and 1310/1550 shunt
Size.....	2” X 2” plus connector and mounting tabs

Block Diagram Low Level Optical Receiver

